



OPEN ACCESS INTERNATIONAL JOURNAL OF SCIENCE & ENGINEERING

ANALYSIS AND DESIGN OF MULTISTOREY BUILDING BY CURTAILMENT OF SHEAR WALL

VIJAY KUMAR LODHI¹, ANKITA AGNIHOTRI², ANANT BHARADWAJ³

¹M.Tech Scholar, Department of Civil Engineering, Sri Aurobindo Institute of Technology, Indore

²Assistant Professor, Department of Civil Engineering, Sri Aurobindo Institute of Technology, Indore

³Head, Department of Civil Engineering, Sri Aurobindo Institute of Technology, Indore

Abstract: The purpose of this research is to investigate the performance and behavior of the symmetrical and un-symmetrical high rise structures with shear wall curtailment subjected to seismic forces and result concluded in terms of base shear, axial forces, max. node displacement, storey drift, maximum shear forces and bending moment. Analysis showing that high rise symmetrical and un-symmetrical type of structures without shear wall have un-acceptable performances for stability and serviceability of high rise structures due to seismic forces but both type of structure with full height shear wall have excellent performances. Similarly shear wall curtailment as in symmetrical high rise structure from 70% height of the structure and shear wall curtailment in un-symmetrical high rise structure from 80% height of the structure as compared to full height shear wall structures having variation in results only of 40% in symmetrical structure and 50% in un-symmetrical structures and all results also within required limits. Hence in this investigation we have defined the height of shear wall curtailment for symmetrical and un-symmetrical type of high rise structures reduces the cost, weight and enhances aesthetic view of the high rise structures.

Keywords: Shear Wall, Axial Force, Node Displacement, Base Shear

I. INTRODUCTION

In recent years, Shear walls are specially designed structural walls which are incorporated in buildings to resist lateral forces that are produced in the plane of wall due to earthquake, wind and flexural members. Shear walls are structural members used to elongate the strength of R.C.C. structures. These shear walls will be construct in each level of the structure, to form an effective box structure. It is necessary to provide these shear walls when the tolerable span-width ratio for the floor or roof diaphragm is exceeded. The present work deals with a study on the improvement location of shear walls in symmetrical high rise building. Position of shear walls in symmetrical buildings has due considerations. In symmetrical buildings, the center of gravity and center of rigidity coincide, so that the shear walls are placed symmetrically over the outer edges or inner edges. So, it is very necessary to find the efficient and ideal location of shear walls in symmetrical & un-symmetrical buildings to minimize the torsion effect. Generally shear wall has highly in plane stiffness and strength which can be used to simultaneously resist large horizontal loads and support gravity load. Shear walls are specially designed structural walls include in the building to resist horizontal forces that are induces in the plane of the wall due to wind, earthquake and other forces. To bring the maximum drift down, lateral displacements & behavior of the structure to

allowable limits.

II. OBJECTIVE OF THE STUDY

The objectives of the present study can be identified as follows:
To study the maximum Storey displacement of the structure under different condition of shear wall as mentioned above for both symmetrical & un-symmetrical type of structures.

To study the storey drift of the structure under different condition of shear wall as mentioned above for both symmetrical & Un-symmetrical type of structures.

To study the maximum base shear of the structure under different condition of shear wall as mentioned above for both symmetrical & un-symmetrical type of structures.

To study the bending moments and shear forces of the structure under different condition of shear wall as mentioned above for both symmetrical & un-symmetrical type of structures.

To study Axial forces of the structure under different condition of shear wall as mentioned above for both symmetrical & un-symmetrical type of structures.


III. MODELLING AND ANALYSIS

Details of structural elements

For the analysis symmetrical and un-symmetrical models we

have considered with the following terms as follows-

- 3.1.1 Plan Dimension of model : 10m x 30.9m
- 3.1.2 No. of stories : 21
- 3.1.3 Floor height : 4m
- 3.1.4 Column sizes : 0.230m x 0.600m
- 3.1.5 Beam sizes : 0.230m x 0.600m
- 3.1.6 Slab thickness : 0.125m
- 3.1.7 Wall thickness : 0.230m
- 3.1.8 Shear wall thickness : 0.230m
- 3.1.9 Density of concrete : 25 KN/m³
- 3.1.10 Density of aac blocks : 6.5 KN/m³ (used for masonry work)
- 3.1.11 Floor weight or dead weight : 4 KN/m² (Including 1 KN/m² finishing load)
- 3.1.12 Member Weight : 5 KN/m (for external & internal walls of storey) & 1.5 KN/m (for 1m height of parapet wall above terrace)

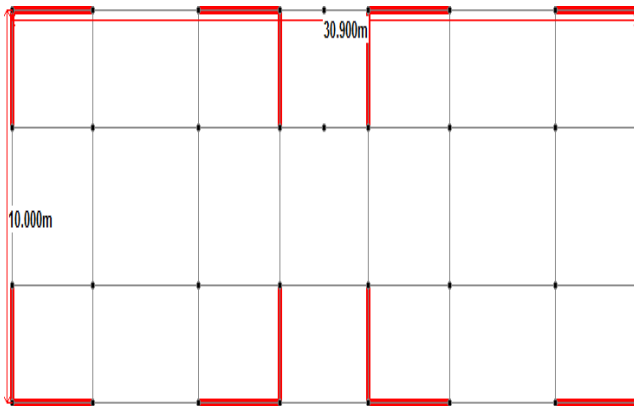


- 3.1.13 Live load : 4 KN/m²
- 3.1.14 Method of analysis : Response spectrum method
Zone-V factor=0.36, Response factor=5, Soil type-I, Depth of foundation = 4m, method-SRSS, Cutoff mode shapes=30.
- 3.1.15 Software used: Staad.Pro.V8i.

Details of geometry of framed models for analysis

- **Symmetrical Model (G+21) – SM21**

MODEL-01-G+21 Model with full height shear wall.

MODEL-02-G+21 Model with shear wall Curtailed from top 3-storey.

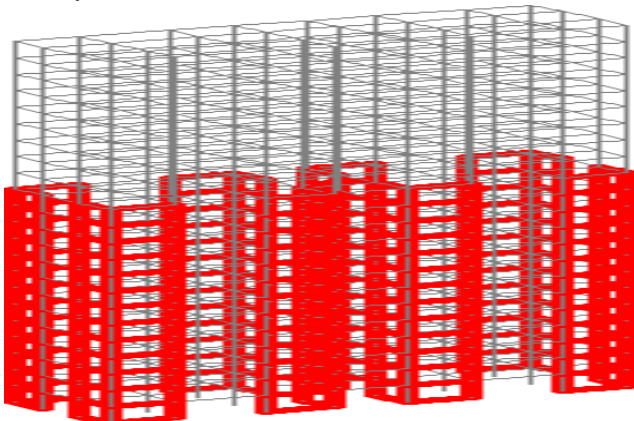


MODEL-03-G+21 Model with shear wall Curtailed from top 6-storey.

MODEL-04-G+21 Model with shear wall Curtailed from top 9-storey.

MODEL-05-G+21 Model without shear wall.

- **Un-Symmetrical Model (G+21) – USM21**
MODEL-01-G+21 Model with full height shear wall.

MODEL-02-G+21 Model with shear wall Curtailed from top 3-storey.

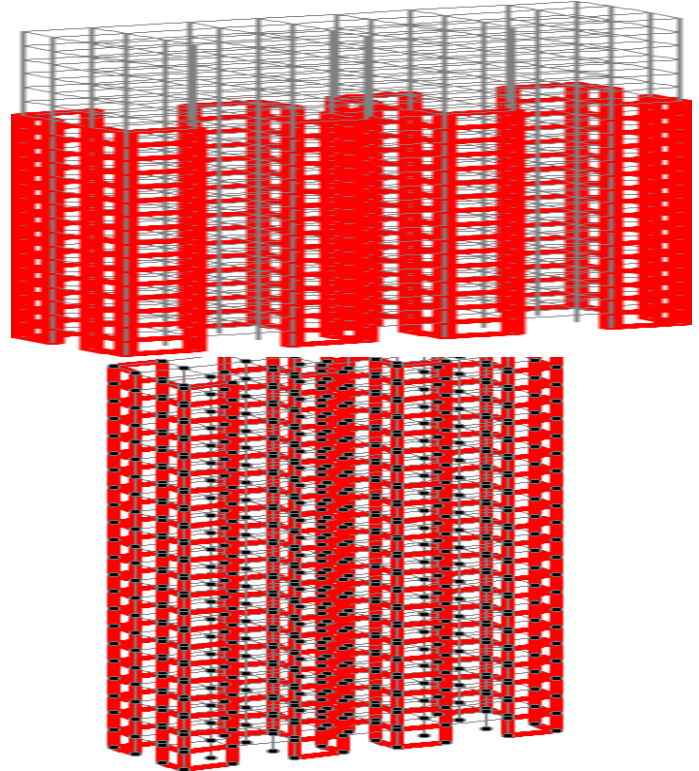

MODEL-03-G+21 Model with shear wall Curtailed from top 6-storey.

MODEL-04-G+21 Model with shear wall Curtailed from top 9-storey.

MODEL-05-G+21 Model without shear wall. Symmetrical Models (G+21) – SM21

MODEL-01-G+21 Model with full height shear wall

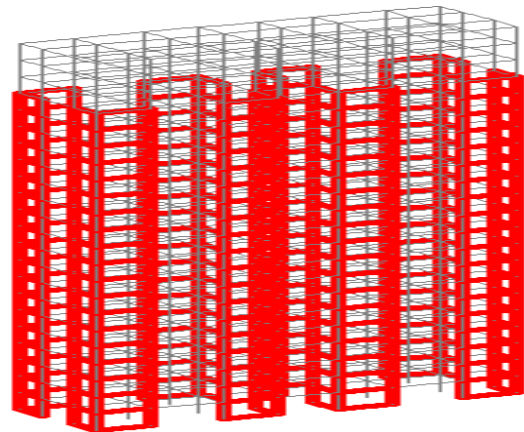


Figure no. 3.2 3D View of symmetrical model-01


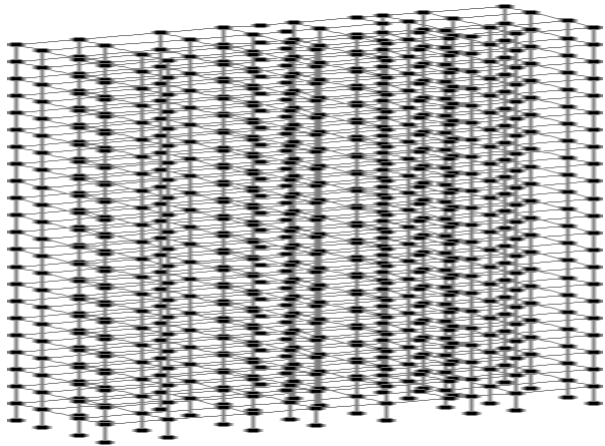


Figure no. 3.6 Plan of symmetrical model-05

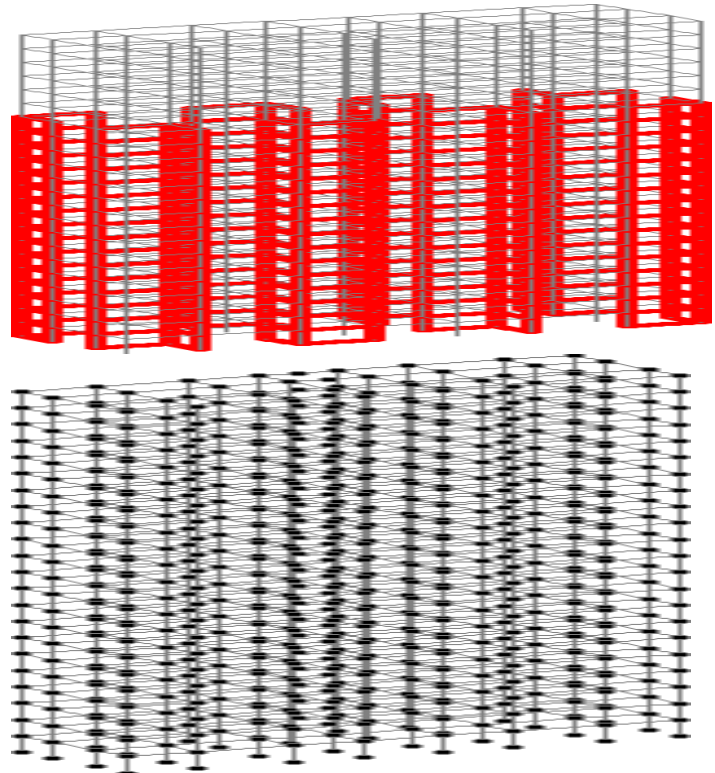

II.MODEL-02-G+21 Model with shear wall Curtailed from top 3-storey


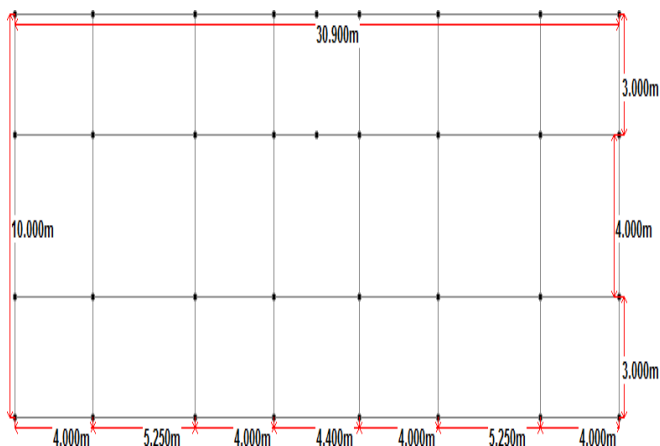


Figure no. 3.3 3D View of symmetrical model-02

III.MODEL-03-G+21 Model with shear wall Curtailed from top 6-storey. Figure no. 3.4 3D View of symmetrical model-03
IV.MODEL-04-G+21 Model with shear wall Curtailed from top

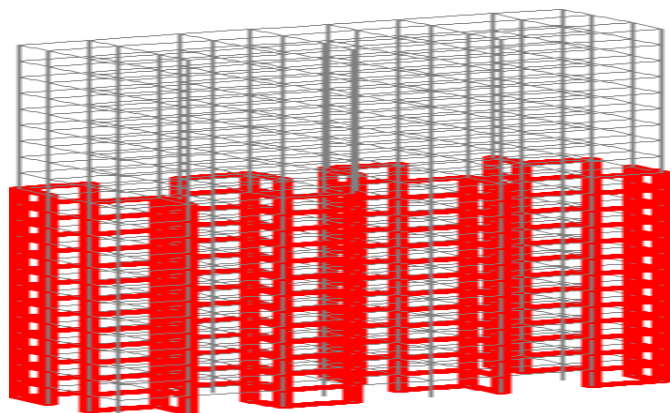

9-storey

Figure no. 3.5 3D View of symmetrical model-04

V.) MODEL-05-G+21 Model without shear wall


Figure no. 3.7 3D View of symmetrical model-05

b.) Un-Symmetrical Model (G+21) – USM21

I.) MODEL-01-G+21 Model with full height shear wall.


Figure no.3.8 Plan of Un-symmetrical model-01

Figure no.3.9 3D View of Un-symmetrical model-01 II.)MODEL-02-G+21 Model

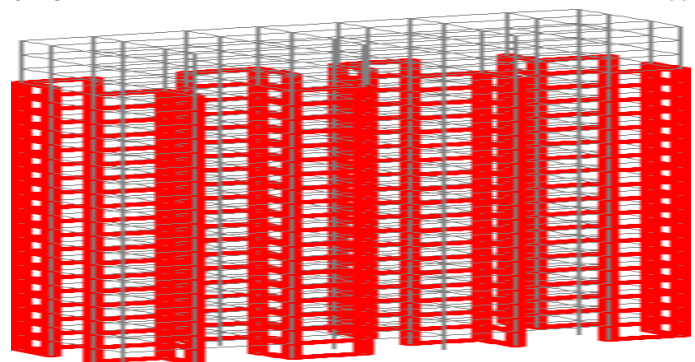

with shear wall Curtailed from top 3-storey.

Figure no.3.10 3D View of Un-symmetrical model-02 III.)MODEL-03-G+21 Model with shear wall Curtailed from top 6-storey

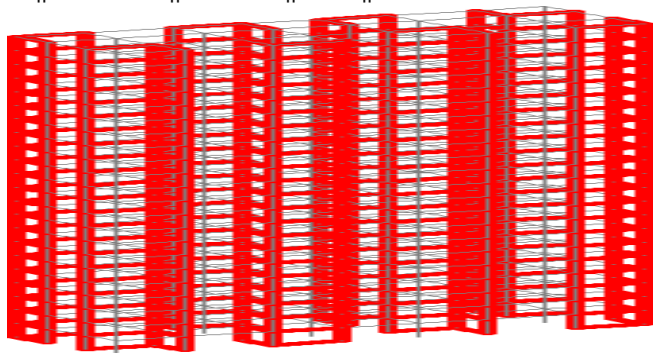

IV.)MODEL-04-G+21 Model with shear wall Curtailed from top 9-storey.

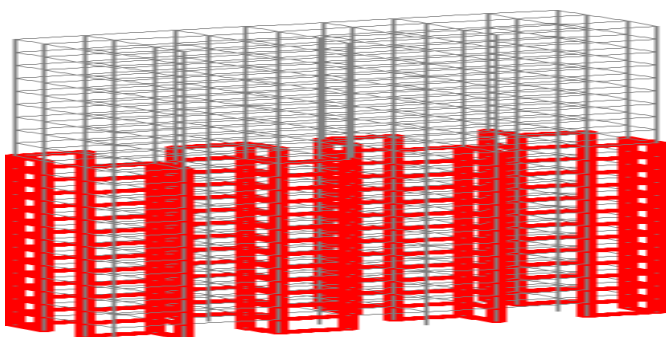


Figure no.3.12 3D View of Un-symmetrical model-04

V.)MODEL-05-G+21 Model without shear wall.

Figure no.3.13 Plan of Un-symmetrical model-05 Figure no.3.14 3D View of Un-symmetrical model-05

IV. RESULT & DISCUSSION


4.1 Comparison of results-

1.) Comparison of base shear-

Table no.4.1 Base Shear of Symmetrical & Un-Symmetrical models-

MODEL' SNO.	DESCRIPTION OF MODELS	BASE SHEAR OF SYMMETRICAL MODEL (KN)	BASE SHEAR OF UN-SYMMETRICAL MODEL (KN)
1	MODEL-01 - G+21 Model with full height Shear wall.	1830.581	1824.731
2	MODEL-02 - G+21 Model with shear wall Curtailed from top 3-storey.	1803.737	1763.851
3	MODEL-03 - G+21 Model with shear wall Curtailed from top 6-storey.	1737.543	1703.031
4	MODEL-04 - G+21 Model with shear wall Curtailed from top 9-storey.	1671.454	1642.207
5	MODEL-05 - G+21 Model without Shear wall.	1475.986	1442.936

Graph : 1. Base shear V/S type of models

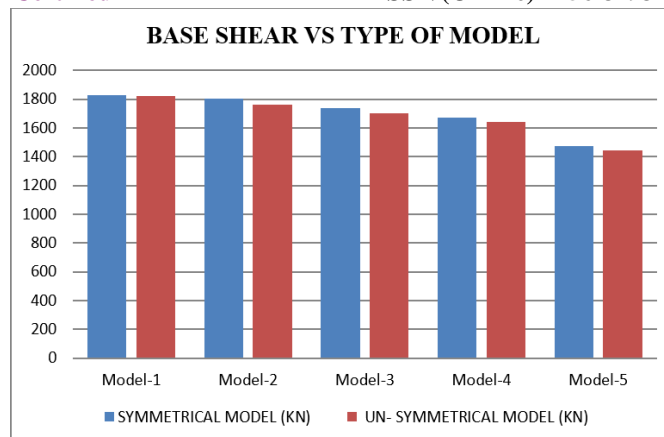


According to the results as mentioned above in symmetrical models-02,03,04,05 base shear continuously decreases by 1.47%, 5.08%, 8.69%, 19.37% as compared to model-01. Similarly in un-symmetrical models-02,03,04,05 base shear continuously decreases by 3.33%, 6.67%, 10%, 20.92% as compared to model-01. Comparatively un-symmetrical models have variation approx 2% more as compared to symmetrical models

2) Comparison maximum axial forces-

Table no.4.2 Axial forces of Symmetrical & Un-Symmetrical models

MODEL' SNO.	DESCRIPTION OF MODELS	AXIAL FORCES OF SYMMETRICAL MODEL (KN)	AXIAL FORCES OF UN-SYMMETRICAL MODEL (KN)
1	MODEL-01 - G+21 Model with full height shear wall.	2509.998	2180.196
2	MODEL-02 - G+21 Model with shear wall Curtailed from top 3-storey.	2407.038	2141.146
3	MODEL-03 - G+21 Model with shear wall Curtailed from top 6-storey.	2394.095	2121.135
4	MODEL-04 - G+21 Model with shear wall Curtailed from top 9-storey.	2908.99	2992.930
5	MODEL-05 - G+21 Model without shear wall.	5232.182	5828.667

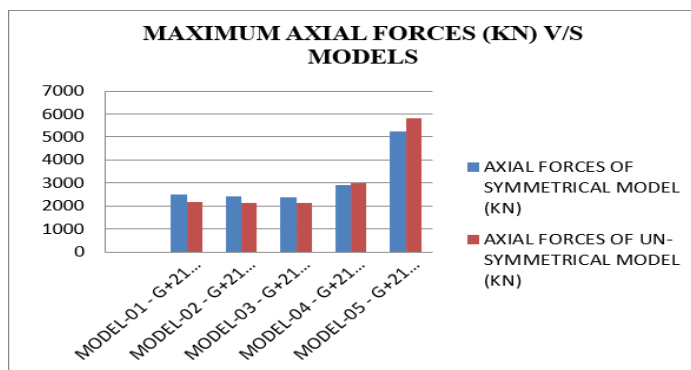

Graph : 2. Maximum Axial force V/S type of models According to the results as mentioned above in symmetrical models-02,03 axial force decreases by 4.10%, 4.61% but in model-04,05 increased by 15.89%, 52.02% as compared to model-01. Similarly in un-symmetrical models-02,03 axial force decreases by 1.79%, 2.70% but in model- 04,05 increased by 27.15%, 62.59% as compared to model-01. Comparatively un-symmetrical models-

02,03 have approx 2% less variation and models- 04,05 have approx 10% to 12% more variation as compared to symmetrical models-02,03 & models- 04,05 in comparison with model-01.


3.) Comparison maximum node displacement in X & Z direction-

Table no. 4.3 Node displacement in X-Direction of Symmetrical & Un-Symmetrical models-


MODEL' SNO.	DESCRIPTION OF MODELS	NODE DISPLACEMENT IN Z DIRECTION FOR SYMMETRICAL MODEL (MM)	NODE DISPLACEMENT IN Z DIRECTION FOR UN-SYMMETRICAL MODEL (MM)
1	MODEL-01 - G+21 Model with full heightshear wall.	209.451	306.901
2	MODEL-02 - G+21 Model with shear wallCurtailed from top 3-storey.	257.820	369.668
3	MODEL-03 - G+21 Model with shear wallCurtailed from top 6-storey.	296.871	470.538
4	MODEL-04 - G+21 Model with shear wallCurtailed from top 9-storey.	337.065	452.3408
5	MODEL-05 - G+21 Model without shearwall.	2767.8	2983.208

Table no. 4.4 Node displacement in Z-Direction of Symmetrical & Un-Symmetrical models-

MODEL'S NO.	DESCRIPTION OF MODELS	NODE DISPLACEMENT IN X DIRECTION FOR SYMMETRICAL MODEL (MM)	NODE DISPLACEMENT IN X DIRECTION FOR UN-SYMMETRICAL MODEL (MM)
1	MODEL-01 - G+21 Model with full heightshear wall.	100.551	106.546
2	MODEL-02 - G+21 Model with shear wallCurtailed from top 3-storey.	101.155	111.295
3	MODEL-03 - G+21 Model with shear wallCurtailed from top 6-storey.	105.256	119.585
4	MODEL-04 - G+21 Model with shear wallCurtailed from top 9-storey.	118.260	141.232
5	MODEL-05 - G+21 Model without shear wall.	368.826	435.39

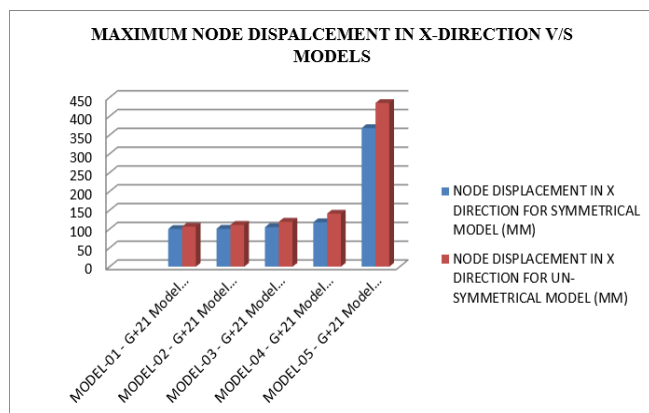

Graph: 3.Maximum Node displacement in X- Direction V/S type of models

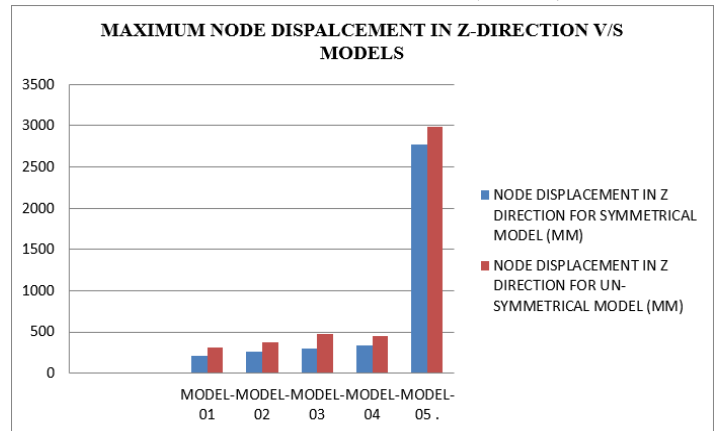

Graph : 4. Maximum Node displacement in Z Direction V/S type of models According to the results as mentioned above in symmetrical models-02,03,04,05 node displacement in X-direction continuously increases by 0.6%, 4.4%, 14.97%, 72.73% as compared to model-01. Similarly in un-symmetrical models-02,03,04,05 node displacement in X-direction continuously increases by 4.26%, 10.9%, 24.59%, 75.52% as compared to model-01.

- Comparatively un-symmetrical models have variation approx 4% to 10% more as compared to symmetrical models.
- According to the results as mentioned above in symmetrical models-02,03,04,05 node displacement in
- Z-direction continuously increases by 18.76%, 29.44%, 37.86%, 92.43% as compared to model-01. Similarly in un- symmetrical models-02,03,04,05 node displacement in Z- direction continuously increases by 16.97%, 34.77%, 32.15%, 89.71% as compared to model-01.
- Comparatively un-symmetrical models have variation approx 2% to 5% less as compared to symmetrical models.

V.CONCLUSIONS

From the above discussion following conclusions can be made.

- On the basis of results and discussion performance of symmetrical and un-symmetrical models-02, 03, 04, 05 as compared to model-01, in terms of base shear, axial forces, max. node displacement, max.
- It has been concluded that model-05 shows un- acceptable performances as compared to model-01 and model-01 shows excellent performances in all conditions. Hence it is necessary to provide shear wall in high rise structure for its serviceability and
- stability against gravity and lateral loading conditions but it is not necessary that shear wall role in high rise structure is same throughout of the structures as discussed on the basis of results of model-02,03,04. Because in results of symmetrical model-02, 03, 04 have approx 40% variation in all results as compared to symmetrical model-01 upto 48m height of structure and all results are within required limit. Similarly in un-symmetrical

there is approx 50% variation in results of model-02,03,04 as compared to un-symmetrical model-01 upto 48m height of structure and all results are within required limit.

International Journal of Civil Engineering and Technology (IJCIET) Volume 7, Issue 6, November-December 2016, pp. 587–591,

VI. REFERENCES

1. Ankur Rathore, Prof. Afzal Khan (2022) “Dynamic Analysis of Multistoreyed Frame Shear Wall Building Considering SSI” International Journal of Trend in Scientific Research and Development (IJTSRD) Volume 6 Issue 5, July-August 2022 Available Online: www.ijtsrd.com e-ISSN: 2456 – 6470

2. Basant Khare¹, Kavita Golghate² “Analysis of Different Shape of High Rise Building with Alternative RCC Shear Walls Using STAAD Pro” International Journal of Progressive Research in Science and Engineering Volume-1, Issue-3, June- 2020

3. Yash Joshi¹, Sagar Jamle², Kundan Meshram³ (2019) “EFFECT OF CURTAILED SHEAR WALL ON DYNAMIC ANALYSIS OF RC BUILDING”

International Journal of Management, Technology And Engineering Volume IX, Issue VII, JULY/2019

4. Patil S.S. and Sagare S.D. [2018] “Seismic Analysis of Multistorey Building with and Without Soft Storey” International Journal of Research in Advent Technology, Vol.6, No.8, August 2018

5. Israa H. Nayel, Shereen Q. Abdulridha, Zahraa M. Kadhum (2018) “THE EFFECT OF SHEAR WALL LOCATIONS IN RC MULTISTOREY BUILDING WITH FLOATING COLUMN SUBJECTED TO

6. SEISMIC LOAD” International Journal of Civil Engineering and Technology (IJCIET) Volume 9, Issue 7, July 2018, pp. 642–651,

7. G. Vimalanandan and Dr. S. Senthilselvan [2017] “ANALYTICAL STUDY ON EFFECT OF CURTAILED SHEAR WALL ON SEISMIC PERFORMANCE OF HIGHRISE BUILDING”

International Journal of Civil Engineering and Technology (IJCIET) Volume 8, Issue 2, February 2017, pp. 511–519

8. Govardhan Bhatt and Abhyuday Titiksh, [2017] “Effect of Curtailment of Shear Walls for Medium Rise Structures” 2nd International Conference on Sustainable Computing Techniques in Engineering, Science and Management (SCESM-2017) -27-28 January 2017

9. Dr. S. B. Shinde and N.B. Raut, [2016] “EFFECT OF CHANGE IN THICKNESSES AND HEIGHT IN SHEAR WALL ON DEFLECTION OF MULTISTORIED BUILDINGS”

10. Ashwinkumar Balaso Karnale, Dr. D. N. Shinde (2015) “Comparative Seismic Analysis of High Rise and Low Rise RCC Building with Shear Wall” International Journal of Innovative Research in Science, Engineering and Technology Vol. 4, Issue 9, September 2015

11. R.S. Mishra, V. Kushwaha, S. Kumar (2015) “A Comparative Study of Different Configuration of Shear Wall Location in Soft Story Building Subjected to Seismic Load.” International Research Journal of Engineering and Technology (IRJET) Volume: 02 Issue: 07 Oct-2015

12. Anila Anna Samson, Preetha Prabhakaran, Dr. Girija K (2014) “EFFECT OF POSITIONING OF RC SHEAR WALLS OF DIFFERENT SHAPES ON SEISMIC PERFORMANCE OF BUILDING RESTING ON SLOPING GROUND” IJCIET, Volume 7, Issue 3, pp. 373 to 384

13. U.L. Salve¹ and R.S. Londhe [2014] “Effect of Curtailed Shear Wall on Storey Drift of High Rise Buildings Subjected To Seismic Loads” IOSR Journal of Mechanical and Civil Engineering (IOSR- JMCE) Volume 11, Issue 4 Ver. IV (Jul- Aug. 2014), PP 45-49